


A Detail
1 : 2

MODEL	A (mm)	B (mm)	C (mm)	VOLUME	WEIGHT (kg)	AREA (INSIDE)
21×62	2064±15	1286.5	886	344L	38.4	2.84 m ²

NOTE:

1. TEST METHOD FOR VESSEL PERFORMANCE COMPLIES WITH NSF/ANSI44-2002 "NSF INTERNATIONAL STANDARD/AMERICAN NATIONAL STANDARD"
2. MAXIMUM WORKING PRESSURE:10.5Bar, WATER MEDIUM TEMPERATURE RANGE: 1°C-49°C; NOT APPLICABLE TO CORROSIVE LIQUID;
3. DIMENSIONAL TOLERANCE:SJ1372-78, GRADE 8.
4. TANK IS SUPPLIED WITH ADAPTOR:

2"NPT MALE ADAPTOR / 1½" SOCKET ADAPTOR
2"BSP MALE ADAPTOR / 50MM SOCKET ADAPTOR

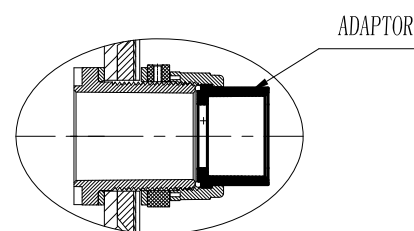

VERSION NO.	DESCRIPTION OF CHANGES:		SIGNATURE	DATE	
	REFERENTIAL PLASTIC SHRINKAGE (IF NECESSARY):				
SIGNATURE		WAVE CYBER (SHANGHAI) CO., LTD.			
NAME	DATE				
DESIGN	SCALE	MATERIAL	MODEL		
INSPECTION			DESCRIPTION 21"VESSEL (4"×4")		
APPROVAL	QUANTITY	WEIGHT	(Threaded Side Inlets)		
THIS PRODUCT DRAWING CAN NOT BE COPIED AND/OR USED WITHOUT PRIOR WRITTEN APPROVAL OF WAVE CYBER.		PROJECTION	COMPUTER CODE	DRAWING NO. 114212-00	VERSION NO. 0
		DO NOT MEASURE THE DIMENSIONS.		UNIT: MM	TOTAL PAGE: 1